

## CEVO-process J-4418



Enhanced flow  
improvement



Faster part  
production



Reduced  
ejection force



Improved  
dispersion

PROCESSING AID –  
BASED ON RENEWABLE PLANT WAXES



biobased

## INNOVATIVE AND RENEWABLE: CEVO-process J-4418

CEVO-process J-4418 is a patented organic ester wax, based on renewable plant waxes. It optimally combines the characteristics of a multi-purpose plastics additive with the appeal of biobased raw materials. It is therefore also perfectly suitable for thermoplastic polymers derived from renewable resources.

In CEVO-process J-4418 natural long-chain fatty acids have been modified by innovative technology to create a biobased polymer additive that meets the highest standards in the polymer industry.

The product is predominantly derived from acids and alcohols in the C26 – C30 range.

### General Advantages

Highly effective in low concentrations:  
CEVO-process J-4418 reveals a broad spectrum of effects: it is extremely versatile and suitable for a wide range of plastics applications as a multi-purpose additive, e.g. re-lease agent, flow improver, dispersing agent and cycle time reducer.

**46% reduced cycle time**  
**15% enhanced flow improvement**  
**46 – 49% reduced ejection force**

Characteristics	Unit	Target value	Method
Acid value	mg KOH/g	12 – 25	ISO 2114
Drop point	°C	83 – 90	ASTM 3954
Biobased carbon content	%	95 – 100	ASTM D 6966-18 Method B
Colour	–	Pale yellow	AA 3.2.1.505

Table 1: Typical characteristics of CEVO-process J-4418

### Examples of Use

Thermoplastics: PA, TPU, PLA, PBT, PC, PVC, styrene. Thermosets: Epoxy resins, phenolic resins, polyurethane  
Dispersing agent for colour master batches and filled

### Technical Study: PA 6

Matrix	Nucleating agent	%	Wax additive
PA 6 Durethan® B 29 + Irgafos® 168 [0.2 wt.%]	None	–	None: Blank 1
PA 6 Durethan® B 29 + Irgafos® 168 [0.2 wt.%]	Microtalc IT extra	0.2	None: Blank 2
PA 6 Durethan® B 29 + Irgafos® 168 [0.2 wt.%]	Microtalc IT extra	0.2 0.5	CEVO-process J-4418
PA 6 Durethan® B 29 + Irgafos® 168 [0.2 wt.%]	Microtalc IT extra	0.2 0.5	WARADUR® E
PA 6 Durethan® B 29 + Irgafos® 168 [0.2 wt.%]	Microtalc IT extra	0.2 0.5	Amide wax (EBS)
PA 6 Durethan® B 29 + Irgafos® 168 [0.2 wt.%]	Microtalc IT extra	0.2 0.5	Calcium stearate

Table 2: Dosage of wax additives in PA 6 Durethan® B 29 (Lanxess)

## 1. Reduced Cycle Time and Enhanced Flow Improvement

The Cycle Time of the aforementioned PA 6 matrices was investigated in an extensive injection moulding study<sup>1</sup>. Unmodified Durethan® B 29 (Lanxess) was stabilised with Irgafos® 168. Microtalc IT extra (Mondo) was added as a nucleating agent. Blank 1 (without nucleating agent) was tested for control. The effect of CEVO-process J-4418 was compared with WARADUR® E, amide wax and Ca-stearate.

In the applied experimental set-up, using standard tools and test specimens, the nucleating agent alone reduced the cycle time by 7%.

The resulting 56% reduced cycle time compared to Blank 1 for WARADUR® E is attributed to the known dispersing effect of the wax, which leads to a much better distribution and efficiency of the nucleating agent.

CEVO-process J-4418 produces a similar cycle time reduction of 46% and significantly outperformed amide wax and Ca-stearate.

The Spiral Flow Number (SFN) was determined by injecting the molten resin into a long, spiral channel testing mould. The SFN is defined as the flow length of the resin. It was demonstrated, as expected, that the flow ability can be significantly increased by using wax additives.

The best flow result was achieved with CEVO-process J-4418. The flow spirals are longer than the reference by >15%. The extension in the equipment set-up used with WARADUR® E is about 8%. Calcium stearate and amide wax: ca. 5 – 5.5%.

<sup>1</sup>ipt – Institut für Polymertechnologien e. V., Wismar. Unpublished results 2017. Experimental details available upon request.

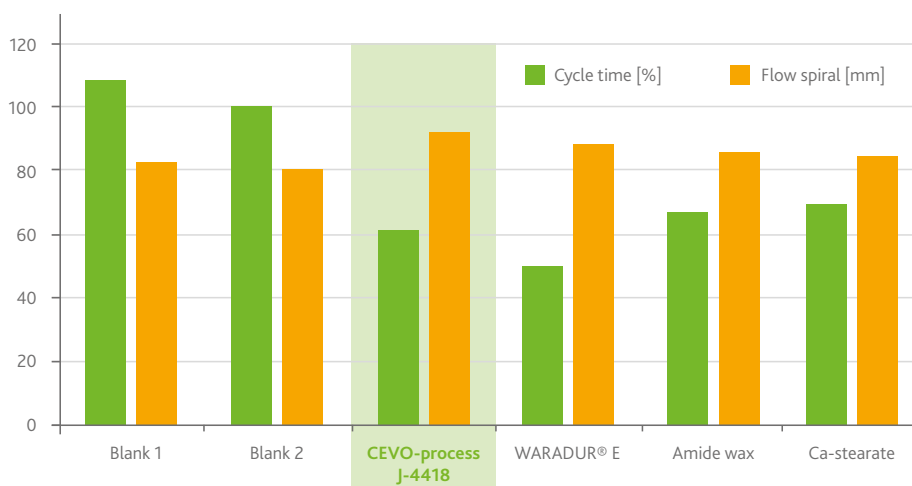


Figure 1: Cycle time reduction and flow improvement

## 2. Improved Mould Release by Reduced Ejection Force

The present studies also analysed the effect of CEVO-process J-4418 on the demoulding properties as an additive in PA 6. The ejection force was analysed in particular. The ejection force (or demoulding force) is defined as the force required to strip the moulded parts from the mould cores. It was demonstrated that the ejection force can be significantly reduced using CEVO-process J-4418: 45.9% compared to Blank 2 and 49% compared to Blank 1.

Slightly better results were only received with WARADUR® E: the ejection force reduction was 50.1% and 53.1% respectively.

The ejection force reduction for amide wax and calcium stearate was between 21% and 31%.

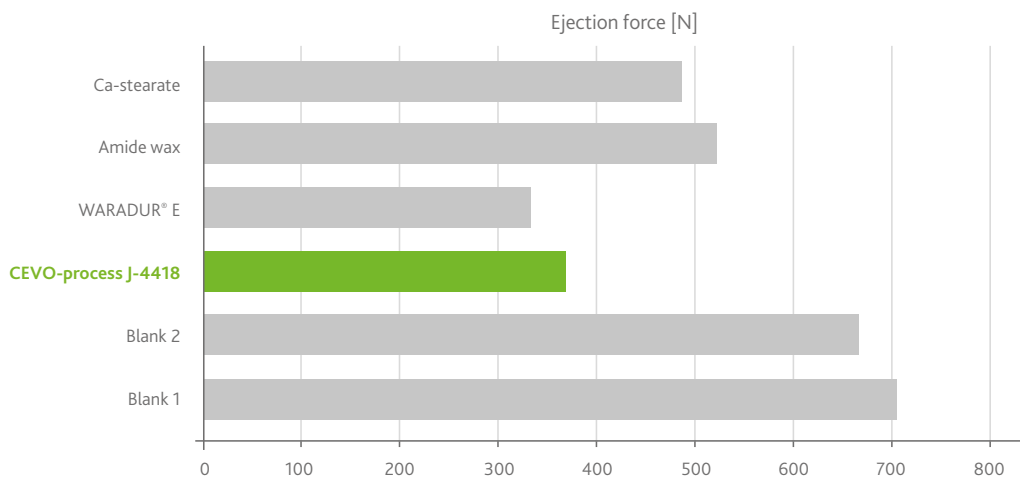


Figure 2: Ejection force reduction

biobased %

### 3. Low Volatility (TGA) and Good Colour Stability

TGA (Thermogravimetric Analysis) measures the weight change of a material, either as a function of increasing temperature, or isothermally as a function of time, in an atmosphere of nitrogen, helium, air, other gas, or in vacuum. The present study was performed under nitrogen with a temperature gradient of 10.00 K/min (25 – 800 °C).

CEVO-process J-4418 weight loss curve shows a very similar profile compared to that of the montan wax WARADUR® E, which is known to satisfy "extra-stringent requirements in terms of performance, compatibility, low volatility or thermal stability"<sup>2</sup>.

<sup>2</sup>Peter W. Dufton: Functional Additives for the Plastics Industry: Trends in Use Smithers; Rapra Publishing, Shawbury, Shrewsbury, Shropshire SY4 4NR, UK, 1998, p. 96

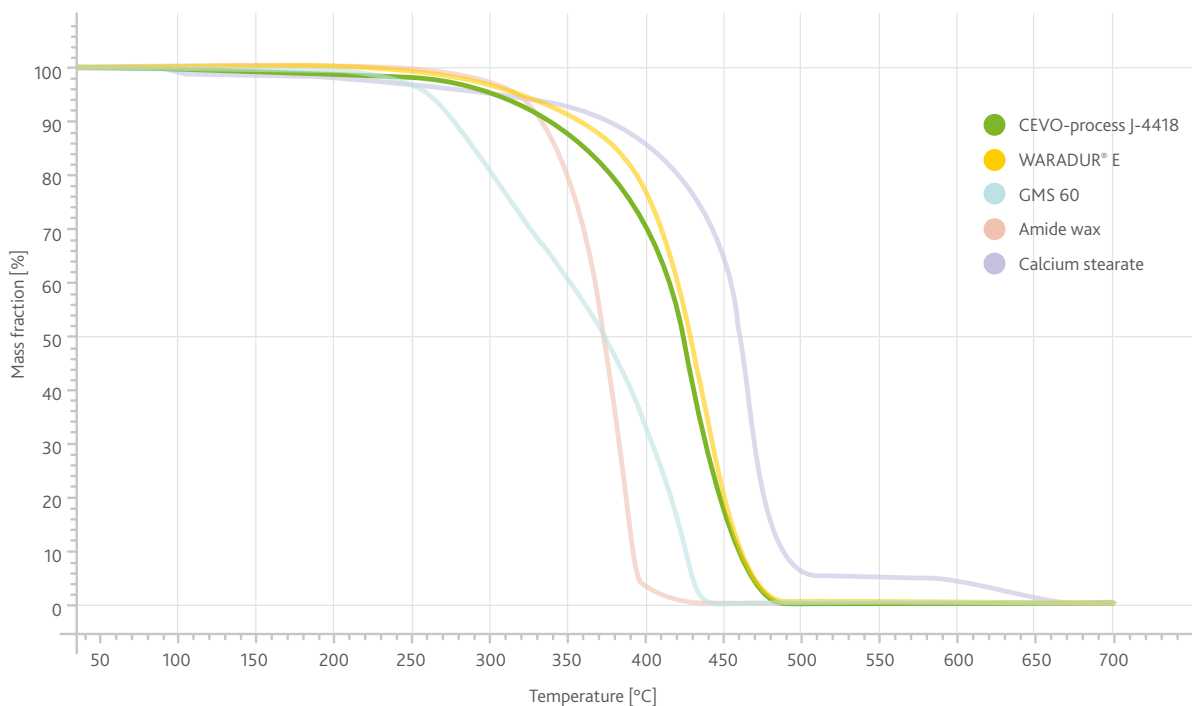


Figure 3: Thermogravimetric analysis (Fraunhofer-Institut WKL, Braunschweig)

This low volatility is combined with good colour stability (Figure 4), especially in comparison to amide wax and Ca-stearate.



Figure 4: Colour stability under thermal stress (Laboratory Air Circulation Oven Heraeus UT 6120: 250 °C/30 min; Ca-stearate: 10 min)

**VOELPKER**

Völpker Spezialprodukte GmbH  
Fabrikstraße 1 | 39393 Völpke | Germany  
Tel. +49 (0) 39402 962-0  
Fax +49 (0) 39402 215  
mailbox@voelpker.com  
www.voelpker.com

Design: [www.artfaktor.de](http://www.artfaktor.de)



**Study conducted by:**

M. Eng. Nico Laufer  
ipt – Institut für Polymertechnologien e. V., Wismar, Germany

**Further information:**

Dr. Lutz Matthies, Head of Business Development  
Völpker Spezialprodukte GmbH, Völpke, Germany



3rd edition | 02/04/2019

We sell our CEVO products in Benelux countries under the brand name VOELPKER.

**Disclaimer**

The information contained herein are believed to be accurate and reliable as of the date issued. However, we do not warrant or guarantee the accuracy or reliability, in particular not for any specific intended use by the customer. It is the responsibility of those to whom we supply our products directly or indirectly to ensure that their use of the product complies with existing regulations, laws, legislations and proprietary rights. The information given by Völpker Spezialprodukte does not exempt the customer from carrying out inspections and analyses on goods purchased.

